


Underfloor Heating with Thermostatic mixing valve

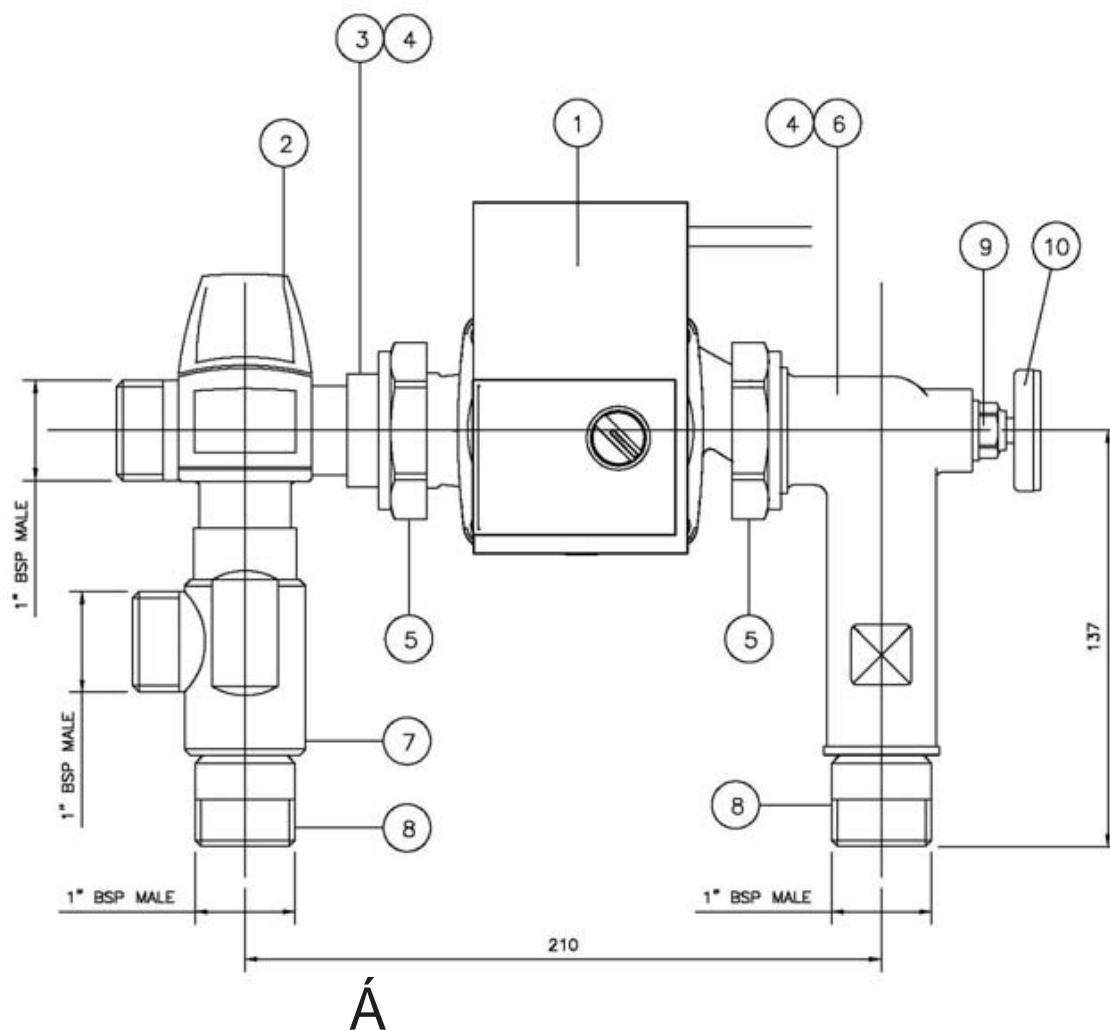

ITEM	DESCRIPTION	QTY
1	WILLO YONOS PARA 25/6	1
2	THERMOSTATIC MIXING VALVE VTA372	1
3	5mm SCREWED FLANGE E1000-03B	1
4	2mm RUBBER WASHER	2
5	1 1/2" RAPID CONNECTION NUT	2
6	ELBOW E-1000-20	1
7	TEE 3/4" x 1" PES07A	1
8	1" BSP MALE ADAPTOR	2
9	3/8" POCKET	1
10	TEMPERATURE GAUGE	1

- Boxed set pre-assembled for immediate installation, including
- Thermostatic mixing valve adjustable from 35°C to 60°C
- Temperature gauge measuring mixed water temperature
- Wilo Yonos Para RS25/6-RKA circulating pump
- 1" M swivel joints for fast connection to 1" F manifold tappings
- All nickel plated for improved appearance
- Built-in non-return valve in flow elbow to allow simple system filling when commissioning
- 1" M close coupled flow and return connections
- Suitable for any manifold with connections on 210mm centres
- Valve body kvs 3.4